




# BXM Serial number

#### *BXM47-*☆ □/■

Symbol	Symbol name	Specify			
☆	Type of side plate	A :side plate without lug / B:side plate with lug			
	Number of holes	1:single hole / 2:two holes / 3:three holes / 4:four holes / 5:five holes / Other holes can be customized			
•	Opening diameter	16: 16mm / 19: 19mm / 22: 22mm / Other apertures can be customized			

## Dimension

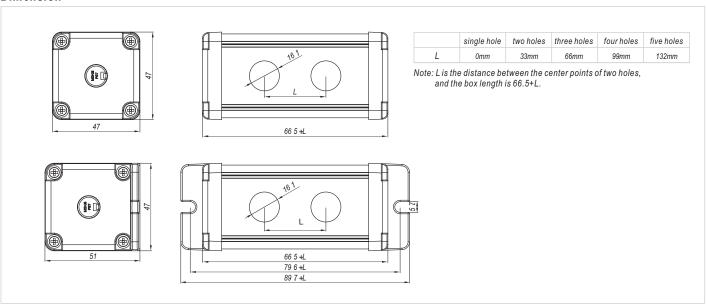






# BXM Serial number

#### *BXM*6076-☆ □/**■**

Symbol	Symbol name	Specify	
☆	Type of side plate	A :side plate without lug / B:side plate with lug	
	Number of holes	1:single hole / 2:two holes / 3:three holes / 4:four holes / 5:five holes / Other holes can be customized	
•	Opening diameter	22: 22mm / Other apertures can be customized	

## Dimension

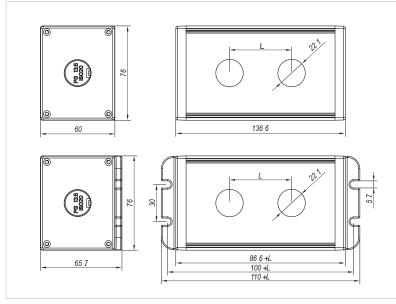

	single hole	two holes	three holes	four holes	five holes
L	0mm	33mm	66mm	99mm	132mm

Note: L is the distance between the center points of two holes, and the box length is 66.5+L.






#### Overview

- o It is waterproof, dust-proof and oil proof, and suitable for harsh working environment.
- It can be used in petroleum, chemical industry, metallurgy and other high dust, weak acid and weak alkali corrosive occasions.
- It can be used as the control box of power transmission, distribution, lighting and other industries.
- Applicable product: all the 22mm push button switch.
- Waterproof grade: IP65.

# Description





## Specification

